





# STARLINK GEN2 PERFORMANCE KIT

## WHAT'S IN THE BOX?



Dish



Wedge Mount



Power Supply



Power Supply Mount




Starlink Cable 25 m



Ethernet Cable 5 m



AC Cable (Power Supply) 1.8 m

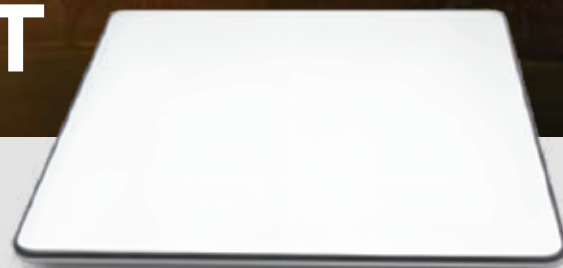

## APPLICATIONS

Designed for fixed or mobility applications and challenging environments. With a wide field of view and enhanced GPS capabilities, it can connect to more satellites, allowing for consistent connectivity while on the go. The hardware is designed for a permanent installation and is more resilient to extreme environments.

## MOUNTS & ACCESSORIES

EnerStar Solutions offers a host of mount options designed to install on the roof of a truck for in motion use or to permanently install on a roof, pole, or wall to avoid obstructions. Other accessories like cable routing kits, extended cable lengths, and access points are also available.

## STARLINK SPECIFICATIONS

Antenna Orientation	Electronic Phased Array
Environmental Rating	Fixed
Snow Melt Capability	IP56
Operating Temperature	Up to 75mm / hour (3in / hour)
Field of View	-30°C to 50°C (-22°F to 122°F)
Average Power Usage	140°
Wind Rating	110-150W
Mounting	Survivable: 280 kph+ (174 mph+)
Dish Weight	Wedge Mount Kit Included
	5.9 kg (13 lbs) without Cable

